



Radiant 18 or 36 LED SPOT

Overview


A high-powered IP67 rated, flood light, combining a thermally designed casing with several colour options and beam patterns, each unit contains 18 or 36 high powered emitters.

This fixture can be supplied with narrow, medium and wide optical beam patterns. The IST Radiant 18 or 36 LED Spot is ideal for both indoor and outdoor use.

Each fixture is supplied with 2 metres of cable. Adjustable side mounting bolts offer full flexibility for the installation position of the luminaire.

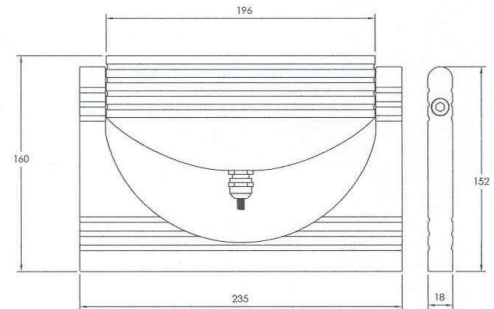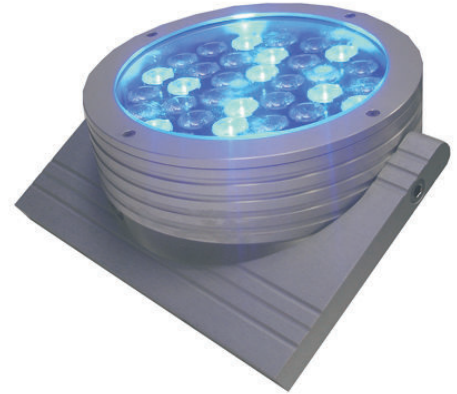

A	B	C	D			
Product	LED Colour Available	LED Colour	No LED's	Optic angle available	Colour Temp or dominant wavelength	Typical Luminous Flux (lm)
ISTL-FLIP	Warm White	WW	18	N=Narrow (5°)	3000K	60
	Neutral White	3WN	36	M=Medium (15°)	4100K	60
	Cool White	3WC		W=Wide (25°)	5500K	100
	Blue	B			470nm	24.5
	Green	G			530nm	70
	Red	R			627nm	41.5
	RGB	RGB			N/A	N/A



Ordering Code: ISTL-FLIP-RGB-36-W equates to a 36 LED Spot fixture in RGB colour change with wide angle optics for outdoor use.

Data	
Max Operating Temp:	+70°C
Operating Ambient:	-10°C to +40°C
Lamp Life:	50,000 hours
Weight:	4.500Kg

INTEGRATED SYSTEM TECHNOLOGIES
 Suite 5, Birch House
 Birch Lane Business Park, Birch Lane
 Aldridge
 West Midlands
 WS9 0NF
 United Kingdom

Recommended Driver:
iDrive™ S350 / ISTL367

www.istl.com