

- ▶ 721lm Output (2700K)
- ▶ 10W Consumption Max
- ▶ 75lm/w typ.
- ▶ Min. 36,000hrs @ L70
- ▶ 57° Beam angle





The Astraea IP65 Elite is a fixed position, recessed downlight designed for efficient and reliable operation in a variety of contexts, including architectural, retail, healthcare, office and hospitality, where demands on quality of light are high and an IP65 rating is required.

Serenity Lighting® provides a high level of service, assisting clients with lighting projects from conception to realisation. Our complementary, highly reliable iDrive® LED driver range provides a unique opportunity to offer the most efficient solution for controlling LED lighting installations.

Interior Recessed Downlight	
Installation	Ceiling recessed
Cut out	75mm diameter
Dimension	100mm(D) x 81mm(H)

Specifications	
Lumen Output	721lm (2700K)
LED Current	350mA
Forward Voltage	29.4V
CCT	2700K, 3000K, 4000K & 5700K. Colour tuneable (2700-5700K)
CRI	80+
Insulation Class	Class III
IP Rating	IP65
Operating Temperature	-20 to 40°C

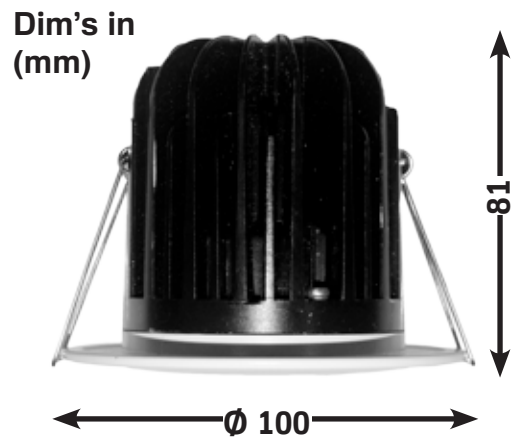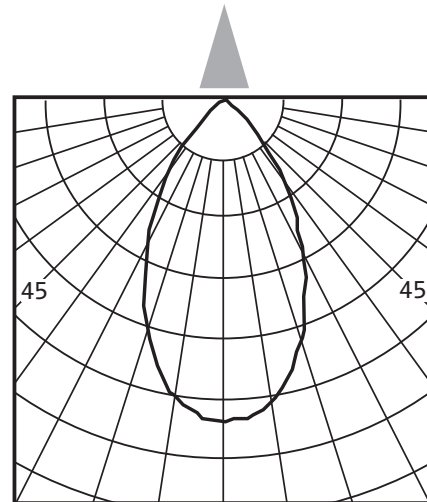

Low Ownership Cost



Safe & Efficient



Quality Construction





Denotes	Options format: AABCCDEEEFGHHHIIJJJJ					
A	Product family	AS = Astraea				
B	Variant	01 = Standard bezel trim	02 = Trimless bezel			
C	IP Rating	65 = IP65				
D	Driver type	1 = Non-dimmable * 2 = Dimmable * 3 = DALI+ * 4 = 1-10V * F = Fixture only				
E	LED Colour (K)	2700	3000	4000	5700	26XX (2700-5700K)
F	Bezel colour	W = White		C = Chrome		1 = Brushed Chrome
G	Diffuser type	C = Clear			F = Frosted	
H	Beam angle	057 = 57°				
I	LED type	BAR = Bridgelux Array			EAR = Colour Tuneable (2700-5700K)	
J	Input current	0350 = 350mA				

* **Standard driver specifications:** Power consumption of driver = 11.7W
 Input voltage range of driver = 220 - 240VAC @ 50Hz

Driver examples

iDrive® DALI+	IDD2011310350
iDrive® SOLO 40	IDI2038540700
iDrive® multiDIM	IDM015292
iDrive® Centralised drivers: Force24 / Force12 / White Knight 36	

DALI+ - single output DALI dimming
SOLO 40 - single output non-dimmable
multiDIM - single output mains dimmable



Force12 - 12 outputs; 320W total
 DMX, RDM, DALI, Art-Net3, KiNet,
 sACN & TCP/IP control.

Serenity Lighting® Products in use



St. Giles Church, Bramhope



Newcastle Theatre Royal



www.serenitylighting.co.uk

t: +44 (0)121 362 1810 e: sales@serenitylighting.co.uk

Serenity Lighting, Serenity House, 31 Gate Lane,
 Sutton Coldfield B73 5TR

Serenity products are covered by a worldwide patent portfolio. For more information please refer to www.serenitylighting.co.uk